

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/005091 A1

(51) International Patent Classification⁷: **B60T 1/087,**
F16D 57/04

JÖNSSON, Hans [SE/SE]; Stålhamravägen 52, S-151
47 Södertälje (SE). **HERMELIN, Gunnar** [SE/SE];
Gotthemsvägen 8, S-151 39 Södertälje (SE).

(21) International Application Number:
PCT/SE2003/000987

(74) Agent: **FORSELL, Hans**; Scania CV AB, Patents, S-151
87 Södertälje (SE).

(22) International Filing Date: 13 June 2003 (13.06.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0202085-7 3 July 2002 (03.07.2002) SE

(71) Applicant (for all designated States except US): **SCANIA**
CV AB (publ) [SE/SE]; S-151 87 Södertälje (SE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **FÄRM, Johnny**
[SE/SE]; Fruängsgatan 29, S-129 51 Hägersten (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: **HYDRODYNAMIC BRAKE**

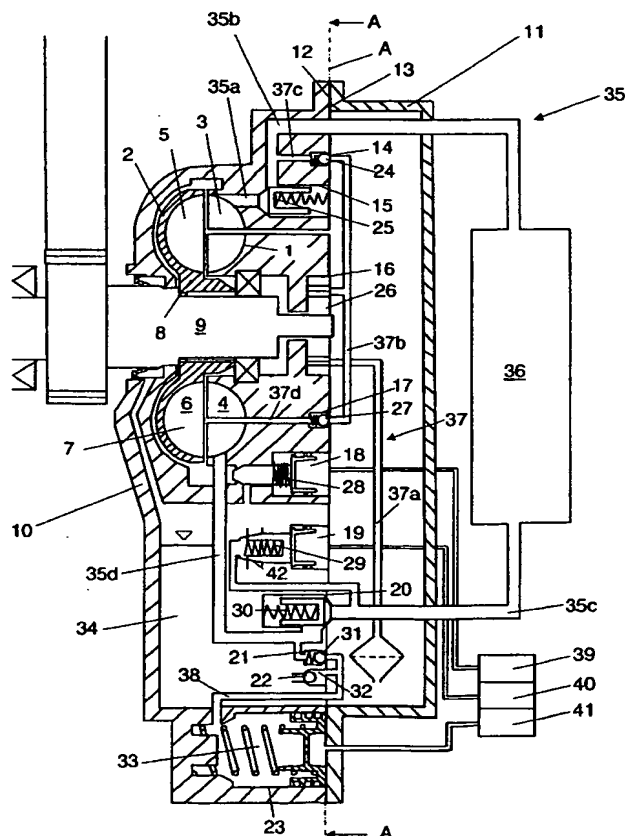

(57) Abstract: The present invention relates to a hydrodynamic brake which comprises a stator (1), a rotor (2), a toroidal space (7) defined by the stator (1) and the rotor (2), a medium which is intended to be supplied to the toroidal space (7) when the brake is activated, and a multiplicity of components (24-33) for allowing regulation of the flow of said medium to and from the toroidal space (7). The hydrodynamic brake incorporates a structure with a multiplicity of recesses (14-23) which each have an opening in a substantially common plane (A) and are each intended to accommodate one of said components (24-33).

WO 2004/005091 A1